

Relentless...

- Dual Wand Workhorse
- Performance in the most challenging environments

Key Features

- ✓ **Liquid Cooled Kubota 32.5HP Engine** - Delivers Maximum Power and Reliable Longevity.
- ✓ **Uncompromising Cleaning Solution Temperature** - Best in class performance — single wand, dual wand, or hard surface cleaning. Unwavering heat from 230°-250° F.
- ✓ **Vacuum and Water Extraction Recovery** - 400+ CFM for Faster Drying, Faster Restoration!
- ✓ **Dual Wand Capable** - plumbed and prepared for you to double your productivity when you need to!
- ✓ **Patented Heat Control System** - ADC Control Diverter manages heat for more consistent temperature delivery and virtually eliminates dumping fresh water during cleaning and water extraction.
- ✓ **Quieter Performance** - Opti Air Flow System and dual oil bath helical gear tri-lobe blower reduces noise resulting in the quietest machine in its class.
- ✓ **Simplified Maintenance** - "Arms Length" design and removable magnetic panels allow for easy access to crucial components and serviceable parts.

TITAN TOUGH



TITAN 575



Applications:

- Dual Wand Cleaning
- Residential and Commercial Carpet Cleaning
- Pressure Washing with full waste recovery capabilities
- Upholstery Cleaning
- Concrete, Stone, Tile and Grout Cleaning
- Water Extraction



What do we mean by TITAN TOUGH?

- "Tough as Nails" TITAN quality with a sleek new design
- More intuitive and easier to use panel directions and graphics make it easier to train new technicians and easier to maintain
- Enhanced appearance makes an impression on your professionalism to your cleaning or restoration customer
- Truckmounts that match your perseverance at delivering optimum performance to your customers
- Legendary performance and reliability from the innovation leader since 1971

HydraMaster
We've Got Your Back



Made in the USA

www.hydramaster.com | 800.426.1301 | 425.775.7272

TITAN™ 575

**Uncompromising Performance,
Incredible Cleaning Temperatures,
Maximize your Investment!**



**2 YEAR
WARRANTY**

Standard Equipment

- Runtime hour meter
- Chemical flow meter (0-10 GPH)
- Chemical flow control valve
- 5 gallon chemical jug
- Vacuum gauge (0-30" Hg)
- Solution pressure gauge (0-1,500 PSI)
- Solution pressure adjustment
- Pre-wired pump-in switch
- Pre-wired AWDS Switch
- Fresh water inlet
- Water system drain valve
- Stainless steel carpet cleaning wand
- Diverter valve (with ADC heat control)
- Diverter/clutch package for flood work
- Electrical circuit protection
- Pump clutch switch
- Solution temperature control selector
- Two solution outlets
- Solution Hose Length: 100 ft x 1/4"
- Vacuum Hose Length: 100 ft x 2"
- Wand Whip Line: 10 ft x 1-1/2"
- 50 ft water supply line
- Recovery Tank: 70 gallon MaxxAir™
- Battery box
- Van installation kit
- Operation & maintenance manual
- Embroidered HydraMaster jacket

Optional Accessories

- 100 Gallon Maxx-Air Recovery Tank Upgrade
- AWDS – Automatic Wastewater Disposal System
- RX20 NEXTGEN Rotary Jet Extraction Wand
- DriMaster 3 Upholstery Tool
- EVOLUTION 2" Wand
- EVOLUTION Stair Wand
- EVOLUTION Flood Extraction Wand
- EVOLUTION GLIDED Upholstery Tool
- EVOLUTION RX12 Rotary Hard Surface Wand
- 70 Gallon Submount Freshwater Tank
- Through Floor Exhaust Kit
- HydraCradle Freshwater Tank/Hose Reel Combo
- 200-300' Capacity Hose Reels manual and electric
- 2000PSI unheated pressure washing kit



Kubota® 32.5 HP Liquid Cooled Engine


- Keyless electronic ignition
- Exceptionally rigid cast iron block
- 3 cylinder OHV design
- Fuel-efficient technology, 1.7 GPH at 300 PSI
- 3-year manufacturer's warranty
- Operating at 3000 RPM

General HTX-1813 High Pressure Pump

- 4.0 GPM volume
- 1,200 PSI heated pressure

4007 Dominator™ Tri-Lobe Blower

- HydraMaster exclusive design
- Dual oil bath design with sight level windows
- Durable helical gear drive
- 400+ CFM

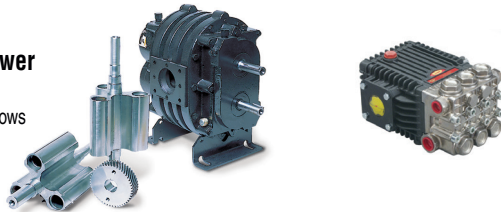


Multi-Stage Thermal Capture and Heat Exchange System with MAX-TEMP Control provides unwavering cleaning solution temperature (230-250°F) and unprecedented control

Engine and blower exhaust fin and tube heat exchanger

- ADC (Automatic diverter valve control) to bypass heat exchanger virtually eliminates dumping fresh water during cleaning or water extraction
- Easy to access and remove core for easy cleaning and maintenance

Engine coolant tube and shell heat exchanger for extra temperature boost that no air cooled engine heat exchanger can match

- MAX-TEMP heat selector control allows this exchanger to be bypassed when you want to reduce cleaning temperature for delicate upholstery or cut-pile carpet



Machine Specifications

- Dimensions: 26"W x 39"H x 45"D
- Weight: 900 lbs
- Chemical System: last-step chemical injection, meter controlled
- Wand Capacity: Dual



HydraMaster warranty service is rated #1 by distributor mechanics



HydraMaster
We've Got Your Back

Made in the USA

www.hydramaster.com | 800.426.1301 | 425.775.7272