





HFT-43 Owner's Manual

PSI RATING: 500-2500 PSI
Up to 230 °F
1 YEAR LIMITED WARRANTY



SWIVEL REPLACEMENT

1. Remove Left and Right housing - 8 screws
2. Remove spray bar 3/4 nub
3. Place 45 degree elbow in vice
4. Loosen swivel nut all the way to top thread
5. Remove bottom swivel nut, remove inner deck
6. Use 22mm wrench to remove swivel.

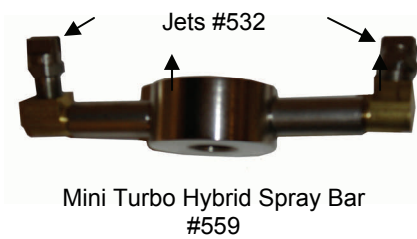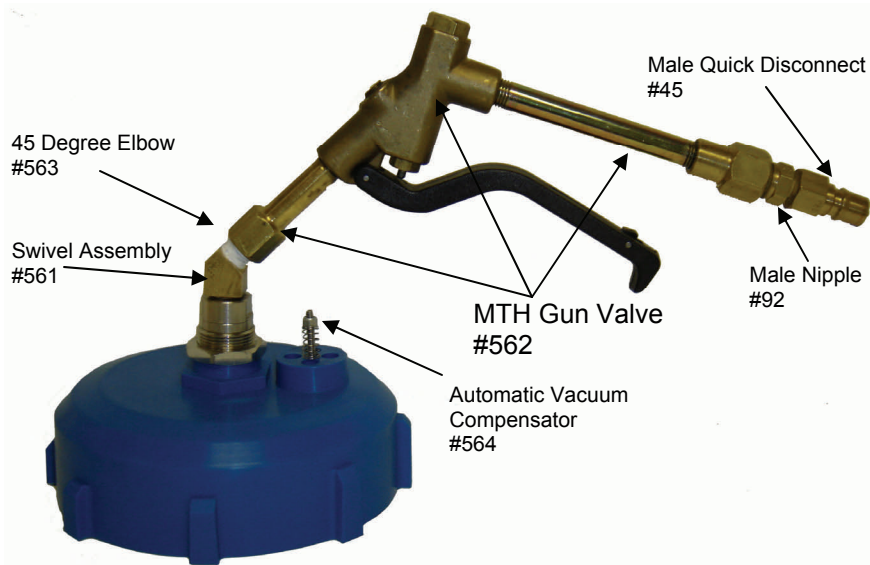

Limitation of Liability

U.S. Products (U.S.P.) liability on any claim for loss or damage connected with the supplying of goods, or their sale, resale, operation, or use, warranty, tort (including negligence) or other grounds, shall not exceed the price allowable to such goods or part thereof involved in any claim.

U.S.P. shall not under any circumstances be liable for any labor charges, special or consequential damages including, but not limited to, bodily injury, loss of profits or revenues, loss of use of any product or associated product, cost of capital, cost of substitute products, facilities or services, downtime costs or costs of claims arising from Buyer or Buyer's customers.

Any technical advice or assistance furnished by U.S. Products which concerns any goods supplied hereunder, will not subject U.S.P. to any liability, whether based on contract, warranty, tort (including negligence) or other grounds.

⚠ DO NOT PUT YOUR HANDS UNDER THE DECK WHILE THE TOOL IS IN USE AND AFTER THE TRIGGER HANDLE IS RELEASED (WAIT 2 MINUTES FOR THE SPRAY BAR TO COMPLETELY STOP), FAILURE TO DO SO CAN CAUSE SERIOUS INJURY AND U.S. PRODUCTS WILL NOT BE HELD LIABLE FOR DISREGARDING THIS WARNING WHICH RESULTS IN ANY BUT NOT LIMITED TO INJURIES, DAMAGE, LOSS OF LIMBS AND OR LIFE.

Warranty:

U.S. Products warrants that it's product(s) (the Product) shall be free from defects in materials and workmanship under normal use, installation and maintenance in accordance with U.S.P. specifications for a period of 1 year from the date of purchase. Failure to maintain the tool as described herein void the warranty.

Exclusions: The swivel (#530) is a sealed item it will not be covered if factory seal is broken from improper adjustment or installation. Swivel must be returned to U.S.P. for evaluation. Swivel will be repaired or replaced at manufacturer's discretion. Swivels that show signs of abuse or misuse will not be warrantied. Interface ring or "boot" (#523 or #524) is covered from breakage or defect only for 90 days; there is no warranty against wear.

This warranty does not cover damage resulting from mishandling in transit, vandalism, misuse, abuse, neglect, alteration, dismantling, excess heat or cold, acts of God, or failure to exercise reasonable care in using or maintaining the Product,. This warranty applies only to the original purchaser / owner of the Product. Original sales receipt / sales contract is required to validate warranty. To obtain service under this warranty, contact your dealer.

This warranty is in lieu of and excludes all other warranties, express or implied, arising by operation of law or otherwise, including any warranty of merchantability or fitness for particular purpose or otherwise, and no representation of warranty, expressed or implied, made by any sales representative or other agent of U.S.P. . In no event shall U.S.P. be liable for incidental or consequential damages.

This warranty gives you specific legal rights which may vary from state to state.