

Invest in Your Unlimited Future!

TITAN 575

Proven Performance in the most challenging cleaning and restoration environments!

Key Features

Liquid Cooled

32.5 HP Engine - Delivers Maximum Power and Reliable Longevity.

Uncompromising

Cleaning Solution Temperature -

Unwavering heat from 230°-250° F.
Best in class performance — single wand, dual wand, or hard surface cleaning.

Extreme

Vacuum and Water Extraction Recovery -
400+ CFM for Faster Drying, Faster Restoration!

Completely

Dual Wand Capable - plumbed and prepared for you to double your productivity when you need to!

Patented

Heat Control System, ADC Control Diverter -
Manages heat for more consistent temperature delivery and virtually eliminates dumping fresh water during cleaning and water extraction.

Quieter

Performance - Opti Air Flow System and Helical gear splash lube tri-lobe blower reduces noise resulting in the quietest machine in its class.

Simpler

Maintenance - "Arms Length" design and removable magnetic panels allow for easy access to crucial components and serviceable parts.

2 YEAR WARRANTY



Applications:

- Dual Wand Cleaning
- Residential and Commercial Carpet Cleaning
- Pressure Washing with full waste recovery capabilities
- Upholstery Cleaning
- Concrete, Stone, Tile and Grout Cleaning
- Water Extraction



We've Got Your Back!

HydraMaster warranty service is rated #1 by distributor mechanics!



Made in the USA

HydraMaster
We've Got Your Back

www.hydramaster.com | 800.426.1301 | 425.775.7272

**Uncompromising Performance,
Incredible Cleaning Temperatures,
Maximize your Investment!**



Standard Equipment

- Runtime hour meter
- Chemical flow meter (0-10 gph)
- Chemical flow control valve
- 5 gallon chemical jug
- Vacuum gauge (0-30" Hg)
- Solution pressure gauge (0-1,500 psi)
- Solution pressure adjustment
- Pre-wired pump-in switch
- Pre-wired APO Switch
- Fresh water inlet
- Water system drain valve
- Stainless steel carpet cleaning wand
- Diverter valve (with ADC heat control)
- Diverter/clutch package for flood work
- Electrical circuit protection
- Pump clutch switch
- Solution temperature control selector
- Two solution outlets
- Solution Hose Length: 100 ft x 1/4"
- Vacuum Hose Length: 100 ft x 2"
- Wand Whip Line: 10 ft x 1-1/2"
- 50 ft water supply line
- Recovery Tank: 70 gallon MaxxAir™
- Battery box
- Van installation kit
- Operation & maintenance manual
- Embroidered HydraMaster jacket

Optional Accessories

- Dura-Flow™ APO (auto pump-out)
- RX-20 rotary carpet extractor
- RX-15H rotary hard surface wand
- DriMaster 3 upholstery tool
- HydraCradle reel/tank combo
- 100 gallon MaxxAir™ recovery tank, aluminum powder coated
- Thru-floor exhaust kit
- Evolution Truckmount Wand
- 2000 PSI unheated pressure washing kit



100 Gallon MaxxAir™ Waste Tank Option Includes a FREE 1 1/2" Evolution Wand Upgrade.



Scan for more information.




Kubota® 32.5 HP Liquid Cooled Engine

- Keyless electronic ignition
- Exceptionally rigid cast iron block
- 3 cylinder OHV design
- Fuel-efficient technology, 1.7 GPH at 300 PSI
- 3-year manufacture's warranty
- Operating at 3000 RPM

General HTX-1813 High Pressure Pump

- 2,000 psi unheated pressure
- 4.0 GPM volume
- 1,200 PSI heated pressure

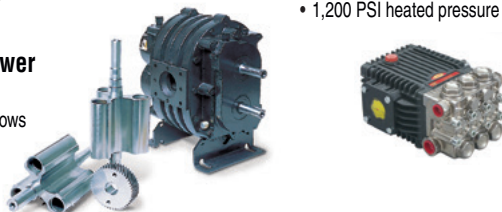

4007 Dominator™ Tri-Lobe Blower

- HydraMaster exclusive design
- Dual oil bath design with sight level windows
- Durable helical gear drive
- 400+ CFM

Multi-Stage Thermal Capture and Heat Exchange System with MAX-TEMP Control provides unwavering cleaning solution temperature (230-250°F) and unprecedented control

Engine and blower exhaust fin and tube heat exchanger

- ADC (Automatic diverter valve control) to bypass heat exchanger virtually eliminates dumping fresh water during cleaning or water extraction
- Easy to access and remove core for easy cleaning and maintenance

Engine coolant tube and shell heat exchanger for extra temperature boost that no air cooled engine heat exchanger can match

- MAX-TEMP heat selector control allows this exchanger to be bypassed when you want to reduce leaning temperature for delicate upholstery or cut-pile carpet



Machine Specifications

- Dimensions: 26"W x 39"H x 45"D
- Weight: 900 lbs
- Chemical System: last-step chemical injection, meter controlled
- Wand Capacity: Dual



Made in the USA

HydraMaster
We've Got Your Back

